

2-FAST • PORT-X

Universal attachment system for a perfect connection

2-FAST is a quick coupling system to connect a module with a mulcher.
The quick couplers allow a fast and easy exchange of the required module/s.

PORT-X is an autonomous carrier for one or two accessories - attached via the quick coupling system.
The hydraulic 3-point linkage of the 1st and 2nd category connects the carrier with the tractor. The support wheels stabilize the carrier while driving between the rows, and the linear hydraulic side shift adjusts the outreach between the crops.

2-FAST and PORT-X are available with or without a hydraulic system, depending on the tractor.

Features		2-FAST	2-FAST direct	PORT-X	PORT-X direct
Linkage/Framework		Framework with quick coupling system to connect mulcher and attachment		3-point rear linkage 1 & 2 cat. including support wheels	
Quick coupling		1 or 2 attachments ("single" or "double")		1 or 2 attachments ("single" oder "double")	
Attachments		XTI, XSC, XSA, XSP, XDF		XTI, XSC, XSA, XSP, XDF, XAN	
Side shift		Manually adjustable		Hydraulically adjustable	
Gearbox		-		540 rpm	
Transmission		Autonomous hydraulic circuit, with pump, tank and control valves	Powered by tractor's hydraulics	Autonomous hydraulic circuit, with pump, tank and control valves	Powered by tractor's hydraulics
Tractor nominal power	Pressure Flow	25-110 HP	180-250 bar [2,6-3,6 k psi] 40-50 l/min [10-13 gpm]	25-110 HP	180-250 bar [2,6-3,6 k psi] 40-50 l/min [10-13 gpm]
Control		Electric remote control	Tractor hydraulic output	Electric remote control	Tractor hydraulic output
Absorber FLEX-SAFE		anti-shock system with spring return		anti-shock system with spring return	
Sensitive toucher		depending on module		depending on module	
Floating mechanism FLOAT		with XTI, XSC and XSA		with XTI, XSC and XSA	
Inclination system (*option)		for XTI, XSC, XSA, XSP and XDF (only "single" right)		for XTI, XSC, XSA, XSP and XDF (only "single" right)	
Oil cooler		double: standard, single: on demand		double: standard, single: on demand	
Weight (Guide value without attachments)		single: 200 kg [440 lb] double: 350 kg [770 lb]	single: 100 kg [220 lb] double: 150 kg [330 lb]	single: 340 kg [750 lb] double: 400 kg [880 lb]	single: 280 kg [620 lb] double: 340 kg [750 lb]



Accessory Carrier
PORT-X



XTI
Tiny Flail Mulcher



XSC
Outrigger Mower



XSA
Cultivator




XSP
Shoot Remover



XDF
Weed Brush


2-FAST	A - Ø	X
XTI	70 cm	60 cm
XSC	50 cm	42 cm
XSC	60 cm	53 cm
XSC	70 cm	62 cm
XSA	40 cm	30 cm
XSP	50 cm	25 cm
XDF	70 cm	30 cm

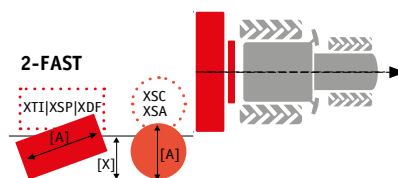

PORT-X	A - cm	B - cm	C - cm	D min - cm	D max - cm
XTI	70 [28]	115 [45]	65 [26]	220 [87]	-
XSC 50	50 [20] Ø	115 [45]	65 [26]	180 [70]	-
XSC 60	60 [24] Ø	115 [45]	65 [26]	190 [75]	-
XSC 70	70 [28] Ø	120 [47]	70 [28]	210 [83]	-
XSA	35 [14] Ø	115 [45]	65 [26]	170 [67]	-
XDF	70 [28]	115 [45]	65 [26]	200 [79]	-
XSP	60 [24]	115 [45]	65 [26]	220 [87]	-
XAN	120 [47] Ø	135 [53]	65 [26]	240 [95]	-
2 x XSC 50	50 [20] Ø	150 [59]	-	200 [79]	330 [130]
2 x XSC 60	60 [24] Ø	150 [59]	-	210 [83]	340 [134]
2 x XSC 70	70 [28] Ø	160 [63]	-	230 [90]	360 [142]
2 x XSA	35 [14] Ø	150 [59]	-	190 [75]	320 [126]
2 x XDF	70 [28]	150 [59]	-	190 [75]	400 [157]
2 x XSP	60 [24]	150 [59]	-	240 [95]	340 [134]
2 x XAN	120 [47] Ø	200 [79]	-	250 [98]	380 [150]

A width/diameter accessory
D distance row width

B width of machine ready for transport
X max. distance from border of the mulcher

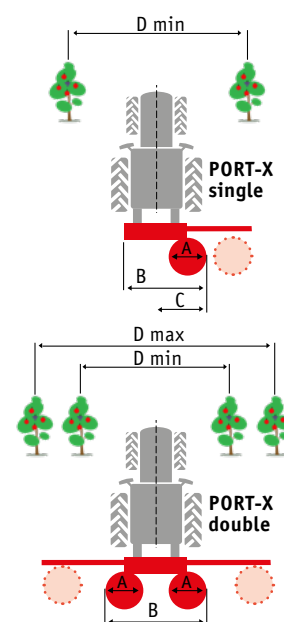

Hydraulic
quick coupling



Quick connector
for the modul