

SMWA multipla

80-150 HP

Ø max. 5 cm [2 inch]

Large area mulcher for up to 6 meters [20 feet] working width

The SMWA multipla combines 3 machines for mowing large areas such as uncultivated land, parks, golf courses and airports. It mulches grass and prunings up to 5 cm [2 inches] and reaches working widths of 6 meters [20 feet].

The multipla hitch has a central and two lateral mulchers. The central device **SMWA rev cf** can be used independently.

The standard hydraulic system with solenoid valves and remote control allows the lifting of each individual mulcher. The mulchers perfectly follow the contours of the ground for a clean cut.

Standard version and characteristics

- > Mulches grass and brush up to 5 cm [2 inches] Ø
- > Working speed 3-10 km/h
- > Trailer hitch with two lateral mowers and the central SMWA rev cf, with 2 wheels and parking stand
- > 1000 rpm gearbox
- > STOPSAFE safety system
- > Belt transmission
- > Hydraulic system with valves and remote control
- > Adjustable rear hood with rubber protection
- > Front protection with metal flaps
- > Support roller 152 mm Ø
- > Rotor with SMW flails

Optional configuration and accessories

- > PTO drive shaft with freewheel and wide angle
- > Rotor with SML flails
- > Rotor with Y flails
- > 540 rpm gearbox
- > Front protection with metal flaps instead of chains
- > Roller scraper
- > Rear lamp kit with anti-collision bar
- > Mud guards



Tools



Flail
SMW



Flail
SML



Knives
Y DUO (SMW)

Specifications • SMWA multipla			Nominal tractor power 80-150 HP	
Working width	cm [inch]	500 [197]	600 [236]	
Overall width	cm [inch]	500 [197]	600 [236]	
Transport width	cm [inch]	240 [94]	240 [94]	
Depth	cm [inch]	450 [177]	450 [177]	
Transport depth	cm [inch]	290 [114]	310 [122]	
Weight · base value	kg [lb]	2.780 [6,130]	2.980 [6,570]	
Belts	qty	3 x 4	3 x 4	
SMW flails	qty	60	66	
SML flails	qty	111	123	
Y knives	qty	111	123	


SMWA multipla · Features

S420


Robust chassis made of high tensile steel.

Functions of the hydraulic system:



- Lifting of mulchers and enable safety hooks
- 1 double acting connection required




STOPSAFE™
safety system, stops
the rotor when the wing
mowers are lifted



Transmission with 3 input
shaft gearboxes

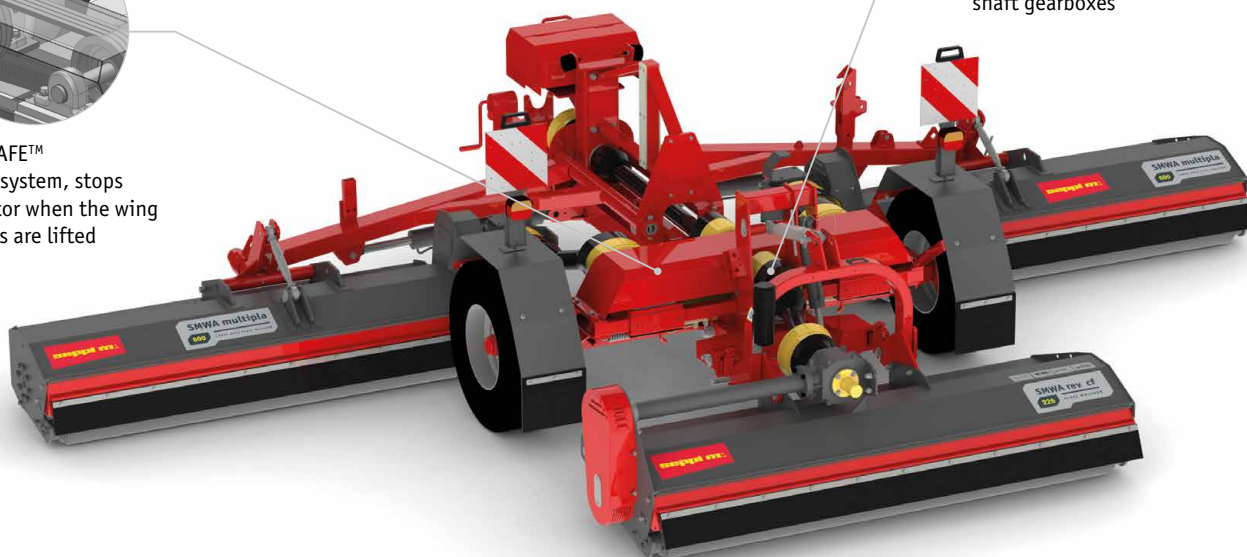

Optional rotor
with Y flails
HELIX ROTOR





Helical rotor
with SMW flails



Double counter cutters inside the chassis
provide a perfect result when mulching.

**COUNTER
CUTTERS**

	A	B	C
500	175 cm [69"]	200 cm [79"]	175 cm [69"]
600	200 cm [61"]	225 cm [89"]	200 cm [61"]

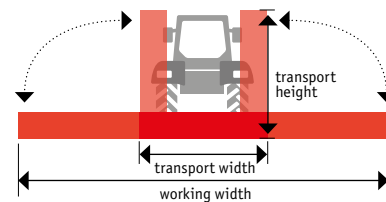

Each single mulcher can be folded up for
transport and parking.