

B 20

130-200 HP max. 20 cm Ø

Pick-up-Mulcher with disc chipper and ejecting chute

Combined technology for a particularly fine mulching result.

The two hydraulic rotors of the B20 pick up the material from the ground while the upper rotor floats up and down. The collected material is fed to the CUT CONTROL rotor inside. The high density of fixed hammers and wear resistant blades already gives an exceptionally good mulching result, before it goes through a second shredding process in the disc wood chipper. The biomass thus derived is ejected with the chute on the field or into the tractor hitch provided.

The efficiency of B20 is so high that an area of one hectare can be completely cleaned in just a few hours. The finely ground residues can be reused as biomass for incineration plants or composted, where they quickly become valuable humus.

Standard version and characteristics

> Mulches brush & wood up to 20 cm [8"] Ø

> Working speed 0-2 km/h

> ISO 3-point rear linkage cat. 3, push drive
(Reverse drive system recommend)

> 750 rpm gearbox

> Dual side belt transmission

> Two hydraulic pick-up rotors

> Disk chipper with exchangeable wear plates and blades made of wear resistant steel

> Wear resistant expulsion chute, hydraulically tiltable and rotatable

> Hydraulically adjustable chute deflector

> Support roller

> High-density CUT CONTROL Rotor
tungsten carbide hammers MINI DUO
Tempered COUNTER CUTTERS

> Chevrons with rear lamps

Required hydraulic fittings

5 double acting

1 extra return



YouTube www.youtube.com/seppimulcher

Specifications • B20

Working width	cm [inch]	150 [59]
Overall width	cm [inch]	200 [79]
Depth	cm [inch]	192 [76]
Height	cm [inch]	230 [91]
Weight (base value)	kg [lb]	3.100 [6,839]
Belts	qty	2 x 5
Flails	qty	28
Nominal tractor power	HP	130-200

Tools




fixed hammers
MINI DUO

B20 · Features

Strong and robust chassis made of high tensile and wear-resistant steel with replaceable wear plates.

AR400

4-in-1: Collection → Mulching → Shredding → Discharging

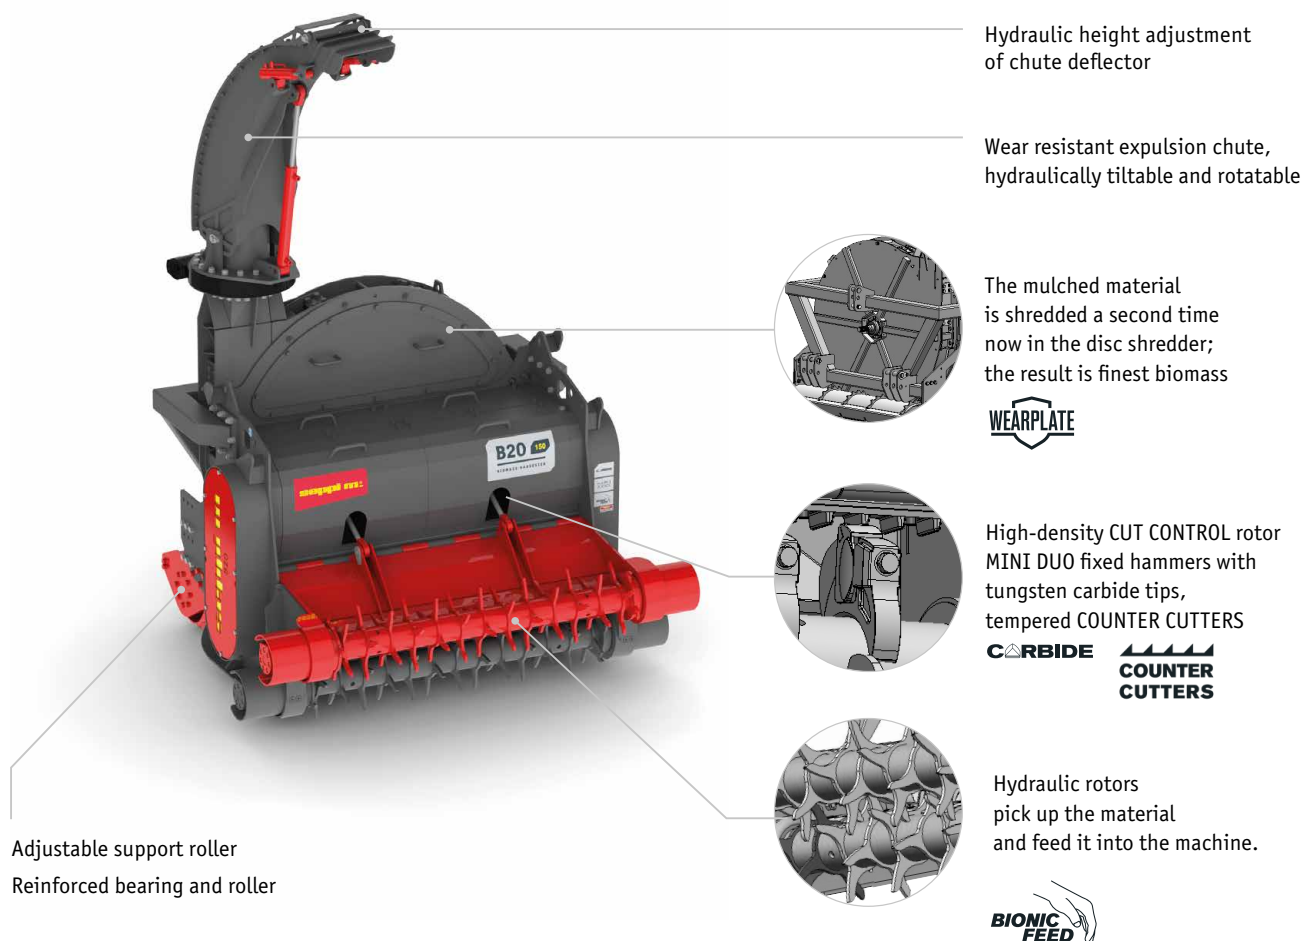

Machine delivered without trailer.

* recommended height

