

MIDIFORST drago

100-190 HP max. 15 cm Ø

Trinciatrice forestale con il sistema per la raccolta del materiale trinciato

The MIDIFORST drago collects wood up to 15 cm [6"] from the ground for further use. As well as wood various other materials such as grass, leaves and biodegradable waste can be mulched and collected.

The mulched material is taken by a conveyor belt up the chute and can then be collected and carted away in a trailer, leaving the soil clear of material.

Thanks to this system, the soil remains free of shredded material and biodegradable material is created for composting and further use.


Standard version and characteristics

- > Mulches wood up to 15 cm [6"] Ø
- > Working speed 0-5 km/h
- > ISO 3-point rear linkage cat. 2
- > 1000 rpm gearbox with freewheel
- > Dual side belt transmission
- > Wear resistant aerodynamic chute, hydraulically adjustable with rubber conveyor belt
- > Hydraulically adjustable chute deflector
- > Adjustable rear hood with variable rakes
- > Support roller
- > Front protection with chains
- > Helical rotor with combination of SMW flails and fixed CARBIDE hammers MINI DUO
- > 4 rows of tempered COUNTER CUTTERS

Required hydraulic fittings

- 3 double acting
- additional 1 in case of trailer



 YouTube www.youtube.com/seppimulcher

Specifications · MINIFORST drago

Working width	cm [inch]	200 [79]
Overall width	cm [inch]	233 [92]
Depth	cm [inch]	140 [55]
Height	cm [inch]	200 [79]
Weight (base value)	kg [lb]	2.220 [4,900]
Belts	qty	2 x 5
Flails	qty	29 + 32
Nominal tractor power	HP	100-190

Tools




flail
SMO




fixed hammer
MINI DUO


MIDIFORST drago · Eigenschaften

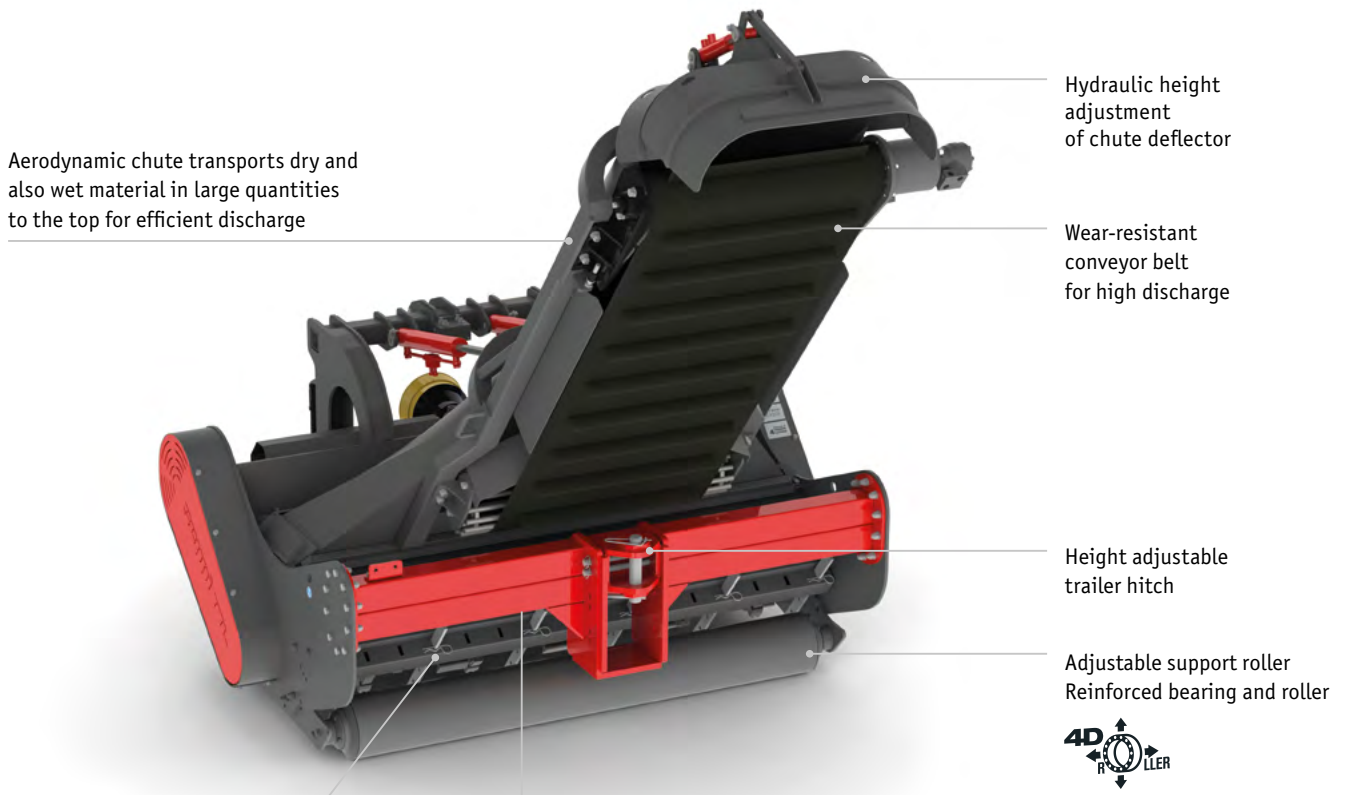

Adjustable rear hood with variable rakes



HELIX ROTOR TECHNOLOGY
COUNTER CUTTERS



Low power consumption at maximum throughput with HELIX rotor technology

Rotor combination with flails and hammers SMO Schlägeln und festen MINI DUO Werkzeugen Tempered counter cutters inside the chassis provide a perfect result when mulching.

Machine delivered without trailer. When using a trailer, make sure it matches the recommended dimensions.

Trailer

Category:	2
Vertical load:	max. 2.000 daN [8,900 lbf]
Trailed mass:	max. 14 tons [30k lbs]

