


XRH

Rotary Hoe

Efficient soil cultivation and weed control using the **XRH rotary hoe**. It cultivates the soil to a depth of 4 cm and throws young weeds to the surface to prevent them from growing back. It can be attached to a SEPPi mulcher or the PORT-X tool carrier using the 2-FAST quick-change system. The angle and inclination of the discs can be flexibly adjusted depending on the desired working width. This understock accessory is ideal for use in dry, sunny weather, as removed seedlings cannot regrow in direct sunlight - an efficient solution for soil cultivation and weed control.



Features	XRH
Application	Tills the soil, removes weeds
Working depth	Up to 4 cm [1.6"]
Working speed	3-5 km/h
Attachment	Mulcher or PORT-X
Connection	Quick coupling
Drive	Manual
Tools	2 serrated discs Angle/tilt adjustable

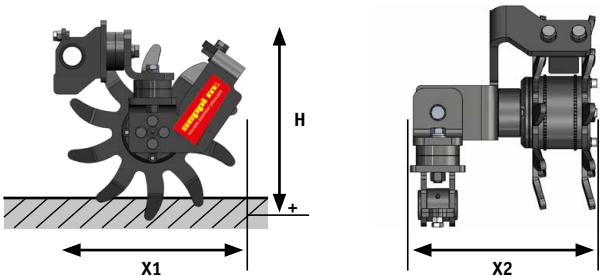

cm Ø ["]	Distance X1 cm ["]	Distance X2 cm ["]	Height cm ["]	Weight* kg [lbs]	Discs
37	42	34	42	35	2

* The weight of the machine is approximate and may vary.

Season	- Spring - Summer - Autumn
Ideal situation	- Dry and sunny weather
Advantage	- Tills the soil and loosens it up - Uprooted seedlings will not grow again in direct sunlight



2-FAST • PORT-X

Universal attachment system for a perfect connection

2-FAST is a quick coupling system to connect a module with a mulcher.
The quick couplers allow a fast and easy exchange of the required module/s.


PORT-X is an autonomous carrier for one or two accessories - attached via the quick coupling system.
The hydraulic 3-point linkage of the 1st and 2nd category connects the carrier with the tractor. The support wheels stabilize the carrier while driving between the rows, and the linear hydraulic side shift adjusts the outreach between the crops.

2-FAST and PORT-X are available with or without a hydraulic system, depending on the tractor.

Features		2-FAST	2-FAST direct	PORT-X	PORT-X direct
Linkage/Framework		Framework with quick coupling system to connect mulcher and attachment		3-point rear linkage 1 & 2 cat. including support wheels	
Quick coupling		1 or 2 attachments ("single" or "double")		1 or 2 attachments ("single" oder "double")	
Attachments		XTI, XSC, XSA, XSP, XDF		XTI, XSC, XSA, XSP, XDF, XAN	
Side shift		Manually adjustable		Hydraulically adjustable	
Gearbox		-		540 rpm	
Transmission		Autonomous hydraulic circuit, with pump, tank and control valves	Powered by tractor's hydraulics	Autonomous hydraulic circuit, with pump, tank and control valves	Powered by tractor's hydraulics
Tractor nominal power	Pressure Flow	25-110 HP	180-250 bar [2,6-3,6 k psi] 40-50 l/min [10-13 gpm]	25-110 HP	180-250 bar [2,6-3,6 k psi] 40-50 l/min [10-13 gpm]
Control		Electric remote control	Tractor hydraulic output	Electric remote control	Tractor hydraulic output
Absorber FLEX-SAFE		anti-shock system with spring return		anti-shock system with spring return	
Sensitive toucher		depending on module		depending on module	
Floating mechanism FLOAT		with XTI, XSC and XSA		with XTI, XSC and XSA	
Inclination system (*option)		for XTI, XSC, XSA, XSP and XDF (only "single" right)		for XTI, XSC, XSA, XSP and XDF (only "single" right)	
Oil cooler		double: standard, single: on demand		double: standard, single: on demand	
Weight (Guide value without attachments)		single: 200 kg [440 lb] double: 350 kg [770 lb]	single: 100 kg [220 lb] double: 150 kg [330 lb]	single: 340 kg [750 lb] double: 400 kg [880 lb]	single: 280 kg [620 lb] double: 340 kg [750 lb]



XTI
Tiny Flail Mulcher



XSC
Outrigger Mower




XSA
Cultivator



XRH
Rotary Hoe



XSP
Shoot Remover



XDF
Weed Brush