

SMWA slim

40-90 HP Ø max. 5 cm [2 inch]

Ultra slim mulching mower - for use in rows with low canopy

The innovative drive concept and compact design make the SMWA slim highly maneuverable in tight situations.

It allows the machine to mulch very close to the crop and therefore can work directly under the canopy without damaging fruit.

Helical distributed and high resistant SMW-flails for universal use are for high cutting quality at uniformly distributed power.

Standard version and characteristics

- > Mulches grass and brush up to 5 cm [2"]Ø
- > Working speed 3-10 km/h
- > 3 point linkage cat. 1&2 reversible
- > Linear hydraulic side shift 27 cm [10.6"]
- > 540 rpm gearbox with freewheel and through shaft
- > Belt transmission with 2+3 high power belts
- > Adjustable rear hood with rubber protection
- > Front protection with metal flaps
- > Support roller 152 mm Ø
- > Standard rotor with SMW flails

Optional configuration and accessories

- > 1000 rpm gearbox
- > Gearbox with automatic inverter and double freewheel
- > Additional 3-point linkage
- > Front attachment
- > Hood with rakes
- > Front protection with chains instead of metal flaps
- > Roller scraper
- > Attachments for undercanopy maintenance (details see separate brochure)



www.youtube.com/seppimulcher

Tools



Specifications · SMWA slim

		135 [53]	145 [57]	155 [61]	175 [69]	200 [79]	225 [89]
Working width	cm [inch]	135 [53]	145 [57]	155 [61]	175 [69]	200 [79]	225 [89]
Overall width	cm [inch]	143 [56]	153 [60]	163 [64]	183 [72]	208 [82]	233 [92]
Depth	cm [inch]	90 [35]	90 [35]	90 [35]	90 [35]	90 [35]	90 [35]
Height · top edge belt chassis	cm [inch]	54 [21]	54 [21]	54 [21]	54 [21]	54 [21]	54 [21]
Height · top edge 3 point linkage	kg [lb]	110 [43]	110 [43]	110 [43]	110 [43]	110 [43]	110 [43]
Weight (base value)	qty	460 [1,010]	470 [1,032]	495 [1,090]	520 [1,140]	550 [1,210]	600 [1,330]
Belts	qty	5	5	5	5	5	5
Flails	qty	12	15	15	18	21	24
Nominal tractor power	HP	40-90	40-90	40-90	40-90	40-90	40-90


SMWA slim · features

Robust chassis made of high tensile steel.

S420



Gearbox for front- and rear attachment

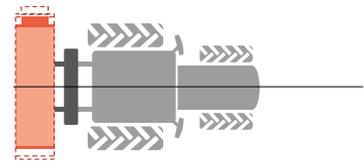

Hydraulic side shift - linear right/left
2 x 13.5 cm = 27 cm
[2 x 5 inch = 10 inch]

The power belt chassis is very compact - this allows the machine to work close to the crop




Adjustable hood to set the degree of mulching



Support roller, adjustable in height
Reinforced bearing and roller



Tempered counter cutters for a perfect mulching result



Rotor with SMW flails
Low power consumption at maximum throughput with HELIX ROTOR technology

