

L9 flex

130-240 HP Ø max. 9 cm [3.5 inch]

Large load mulcher for professional use

The model **L9 flex** is a powerful and reliable offsetting mulcher for large areas.

The particularly stable construction with the PENTALINK system allows the mulcher its high performance along riverbanks and roadsides.

The mulcher has a wide parallelogram lateral displacement and can be hydraulically tilted far up and down during operation. A product feature that allows the mulcher to adapt optimally to the specified slope.

The FLEX-SAFE anti-collision system guarantees the operator time to react.

The large diameter of the support roller on the mulcher allows an easier guidance on uneven ground. The roller is adjustable and the cutting height can be regulated with ease.

Standard version and characteristics

- > Mulches grass and brush up to 9 cm [3.5"] Ø
- > Working speed 3-10 km/h
- > 3 point linkage cat. 3
- > FLEX-SAFE anti-collision system
- > 1000 rpm gearbox
- > Belt transmission
- > Hydraulic side shift 107 cm [42"] to the right
- > Hydraulic inclination from +90° to -60°
- > Support roller under the base unit, adjustable roller under the mulcher
- > Front protection with chains
- > Rear protection with rubber
- > Triple helical rotor with flails
- > 2 rows of tempered counter cutters

Optional configuration and accessories

- > PENTALINK system 3 point linkage cat. 3 and 2 additional attachment points
- > PTO drive shaft with double wide angle
- > 750rpm gearbox (max. 200 HP)
- > Roller scraper
- > Hydraulic adjustable front hood (not available for 275)
- > Additional front rubber flap
- > Rear lamp kit with chevrons

Required hydraulic fittings

2 double acting



 www.youtube.com/seppimulcher


Specifications · L9 flex				
		225 [89]	250 [98]	275 [108]
Working width	cm[inch]	225 [89]	250 [98]	275 [108]
Overall width	cm[inch]	225-465 [89-183]	225-490 [89-193]	225-515 [89-203]
Depth · transport	cm[inch]	140 [55]	140 [55]	140 [55]
Height	cm[inch]	110-295 [43-116]	110-320 [43-126]	110-345 [43-136]
Weight · base value	kg [lbs]	1.720 [3,790]	1.800 [3,970]	1.880 [4,140]
Belts	qty	5	5	5
Flails	qty	24 SMO	27 SMO	27 SMO
Tractor weight	kg	4.000 [8,800]	4.500 [9,900]	4.500 [9,900]
Nominal Power	HP	130-240	130-240	130-240

Tools Flails



L9 flex · Features


Strong and robust casing made of high-tensile steel, with replaceable wear plates.



The boom can be angled 90 ° upwards and tilted 60° downwards


Working depth from the edge
 $L = \text{working width} + 20 \text{ cm [8 inch]}$
 Maximum reach with innovative parallelogram side shift
 $D = 124\text{-}231 \text{ cm [49-91 inch]}$

P Shift



Easy mulching of heavy brush with hydraulically adjustable front hood (option for 175|200|225|250)

Efficient contour adaption with SPACE LINK suspension

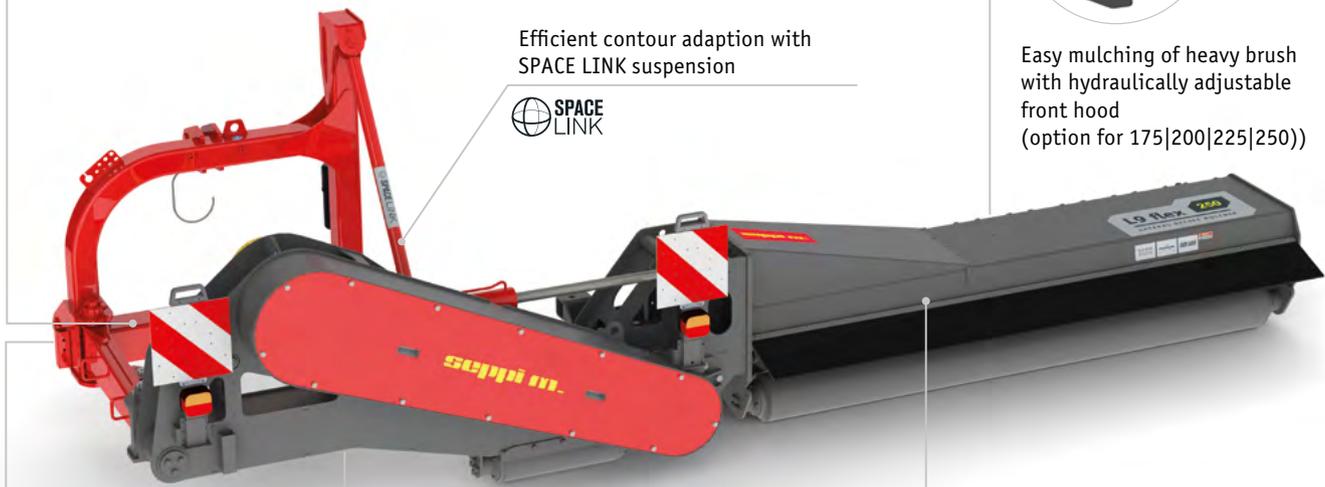

Option: Safe and comfortable connection with PENTALINK stabilization system




Safety and prevention thanks to FLEX-SAFE anti-collision system

FLEX-SAFE



Tempered counter cutters for a perfect mulching result



Rotor with SMW/SMO flails
 Low power consumption at maximum throughput with HELIX ROTOR technology

